

MCCC (LOCK-UP) SOLENOID for AXODE/AX4S

'91-up Lincoln, '92-up Vehicles


96952 .98 to 1.6 ohms



WARNING: Square Teckpak Solenoid #96952 replaces square OEM Solenoid. **DO NOT INTERCHANGE LOCK-UP & MCCC SOLENOID! DO NOT REPLACE ROUND SOLENOID WITH SQUARE SOLENOID. THIS WILL CODE COMPUTER!**

Figure 1

Remove these four valve body bolts.

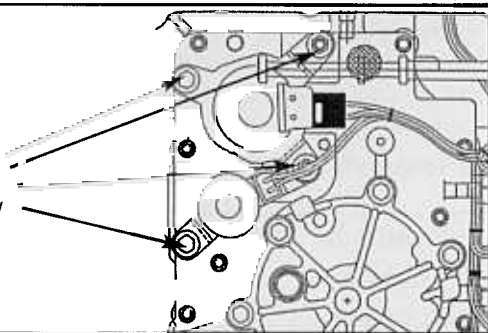

1. To Remove the old MCCC Lock-up solenoid, unplug the harness from the old solenoids, and remove the four 8mm bolts holding the EPC and MCCC Lock-up solenoids to the valve body (**Figure 1**). Remove the EPC solenoid. Remove MCCC Lock-up solenoid.

2. **To Install:** Insert the new Teckpak MCCC Lock-up solenoid (**Figure 2**), into the valve body. Reinstall the EPC solenoid in the valve body. Insert and tighten the four retaining bolts shown in **Figure 1**.

3. Connect the new MCCC Lock-up solenoid by plugging it into the wiring harness.